


**photoelectric sensor
receiver
QS18VP6RBQ8**


TURCK

Industrial
Automation



- Operating voltage 10...30 VDC
- indication of insufficient excess gain
- LED visible from all sides
- light/dark operation
- M12 x 1 male connector

Wiring diagram




Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremely high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions.

Excess gain curve

Excess gain in relation to the distance (type 6EB/RB)

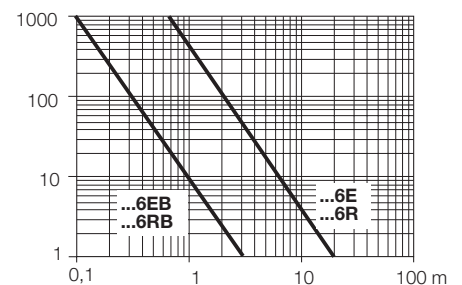

Type	QS18VP6RBQ8
Ident-No.	3066462
Operating mode	opposed mode sensor (receiver)
Max. sensing range [mm]	0... 3000 mm
Ambient temperature	-20...+ 70 °C
Operating voltage	10... 30VDC
DC rated operational current	≤ 100 mA
No-load current I_0	≤ 32 mA
Short-circuit protection	yes / cyclic
Reverse polarity protection	yes
Output function	normally open / normally closed, pnp
Switching frequency	≤ 400 Hz
Readiness delay	≤ 100 ms
Housing	rectangular, QS18
Dimensions	27.7 x 15 x 35 mm
Housing material	plastic, ABS
Lens	plastic, acrylic
Connection	Connectors, M12 x 1
Degree of protection	IP67
Operating voltage display	LED green
Display switch state	LED yellow
Error indication	LED green flashing
Excess gain indication	LED yellow flashing