


photoelectric sensor



diffuse mode sensor with background suppression

M18SN6FF50



- selectable light or dark operation or light operation with alarm function
- connection cable, 2 m
- Connecting cable, 2 m

Wiring diagram




Functional principle

The emitter and receiver are incorporated in a single housing. The light reflection of the target is detected and triggers the sensor to switch. Thus the switching distance largely depends on the reflectivity of the target.

Excess gain curve

Excess gain in relation to the distance

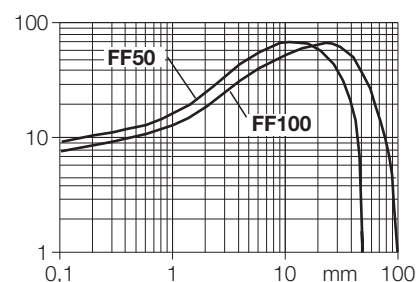

Type	M18SN6FF50
Ident-No.	3048668
Operating mode	diffuse mode sensor with fixed-field background suppression
Light type	IR
Wavelength	880 nm
Range	0... 50 mm
Ambient temperature	-40...+ 70°C
Operating voltage	10... 30 VDC
DC rated operational current	≤ 150 mA
No-load current I_0	≤ 35 mA
Output function	connection programmable, NPN
Switching frequency	≤ 160Hz
Readiness delay	≤ 100 ms
Overcurrent release	>220 mA
Housing	cylindrical/threaded, M18
Dimensions	65mm
Housing diameter	Ø 18mm
Housing material	Metal, V2A (1.4305)
Lens	plastic, acrylic
Electrical connection	cables
Cable length	2 m
Cable cross section:	4 x 0.5mm ²
Protection class	IP67
Operating voltage	LED green
Switching state	LED yellow
Error indication	LED green flashing
Alarm display	LED yellow flashing