


**photoelectric sensor
emitter
Q256E**


TURCK

Industrial
Automation



- Connection cable, 2 m
- degree of protection IP68 - IP69K

Wiring diagram




Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite to each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. The excellent light/dark contrast and the high excess gain allow operation over larger distances and under difficult conditions.

Excess gain curve

Excess gain in relation to the distance

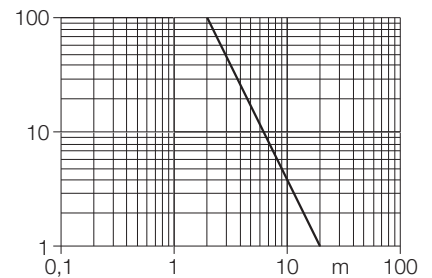

Type	Q256E
Ident-No.	3031926
Operating mode	opposed mode sensor (emitter)
Light type	IR
Wavelength	950 nm
Range	0... 20000 mm
Ambient temperature	-40...+ 70°C
Operating voltage	10... 30 VDC
DC rated operational current	≤ 150 mA
No-load current I ₀	≤ 20 mA
Housing	rectangular, Q25
Dimensions	30x 25x 50.2mm
Housing material	Plastic, PBT
Lens	plastic, Lexan
Electrical connection	cables, PVC
Cable length	2 m
Cable cross section:	2 x 0.5mm ²
Protection class	IP68 / IP69K
Operating voltage	LED green