


photoelectric sensor



diffuse mode sensor with background suppression

Q25SN6FF100



- selectable light or dark operation or light operation with alarm function
- Connection cable, 2 m
- degree of protection IP68 - IP69K
- Operating voltage 10...0 VDC
- npn switching output
- degree of protection IP69K

Wiring diagram




Functional principle

The emitter and receiver are incorporated in a single housing. The light reflection of the target is detected and triggers the sensor to switch. Thus the switching distance largely depends on the reflectivity of the target.

Excess gain curve

Excess gain in relation to the distance

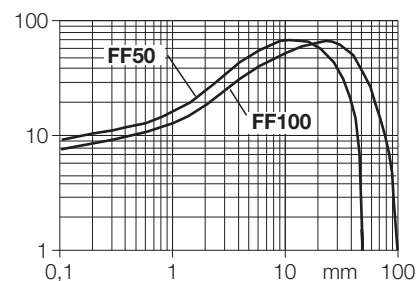

Type	Q25SN6FF100
Ident-No.	3031931
Operating mode	diffuse mode sensor with fixed-field background suppression
Light type	IR
Wavelength	880 nm
Range	0... 100 mm
Ambient temperature	-40...+ 70°C
Operating voltage	10... 30 VDC
DC rated operational current	≤ 150 mA
No-load current I_0	≤ 35 mA
Output function	connection programmable, NPN
Switching frequency	≤ 160Hz
Readiness delay	≤ 100 ms
Overcurrent release	>220 mA
Housing	rectangular, Q25
Dimensions	30x 25x 50.2mm
Housing material	Plastic, PBT
Lens	plastic, acrylic
Electrical connection	cables
Cable length	2 m
Cable cross section:	4 x 0.5mm ²
Protection class	IP68 / IP69K
Operating voltage	LED green
Switching state	LED yellow
Error indication	LED green flashing
Alarm display	LED yellow flashing