

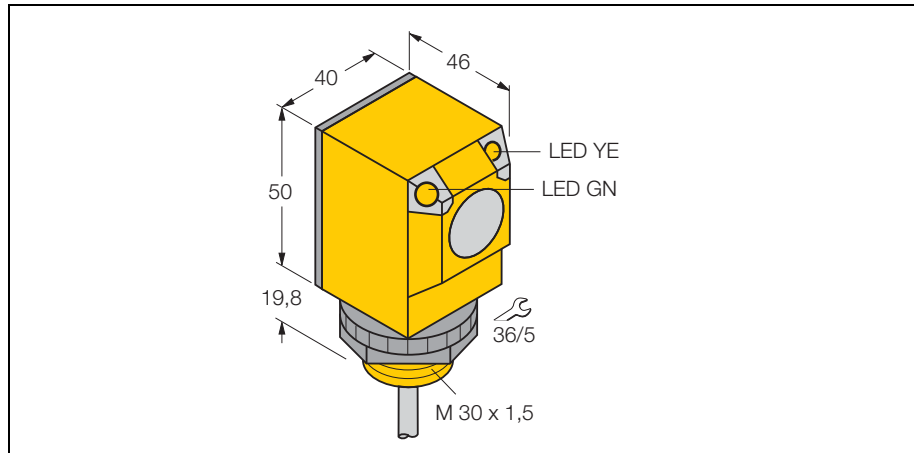


photoelectric sensor retro-reflective sensor with polarisation filter Q40SN6LP



- Connection cable, 2 m
- degree of protection IP68 - IP69K
- Operating voltage 10...0 VDC
- npn switching output
- degree of protection IP69K

Wiring diagram




Functional principle

Retro-reflective sensors incorporate emitter and receiver in a single compact housing. The light beam of the emitter is directed towards a reflector which returns the light back to the receiver. An object is detected when it interrupts this beam. Retro-reflective sensors have a high function gain and good contrast performance. Further it is merely required to install and wire a single device.

Excess gain curve

Excess gain in relation to the distance

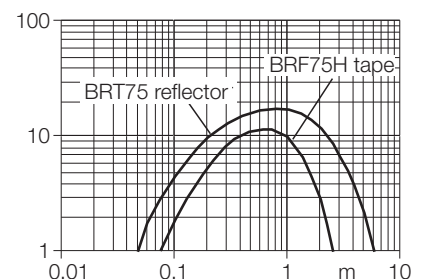

Type	Q40SN6LP
Ident-No.	3032360
Operating mode	retro-reflective sensor with polarisation filter
Light type	red
Wavelength	680 nm
Range	50... 6000 mm
Ambient temperature	-40...+ 70°C
Operating voltage	10... 30 VDC
DC rated operational current	≤ 150 mA
No-load current I_0	≤ 30 mA
Output function	connection programmable, NPN
Switching frequency	≤ 160Hz
Readiness delay	≤ 100 ms
Overcurrent release	>220 mA
Housing	rectangular, Q40
Dimensions	46x 40x 69.8mm
Housing material	Plastic, PBT
Lens	plastic, acrylic
Electrical connection	cables
Cable length	2 m
Cable cross section:	4 x 0.5mm ²
Protection class	IP68 / IP69K
Operating voltage	LED green
Switching state	LED yellow
Error indication	LED green flashing
Alarm display	LED yellow flashing