


**photoelectric sensor
emitter
T306E**


TURCK

Industrial
Automation

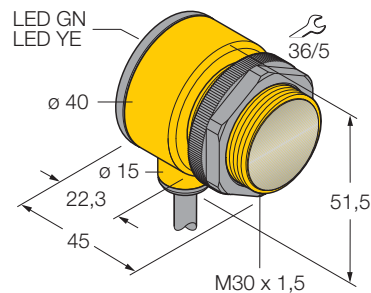

- Connection cable, 2 m
- degree of protection IP68 - IP69K

Wiring diagram




Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite to each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. The excellent light/dark contrast and the high excess gain allow operation over larger distances and under difficult conditions.

Excess gain curve

Excess gain in relation to the distance

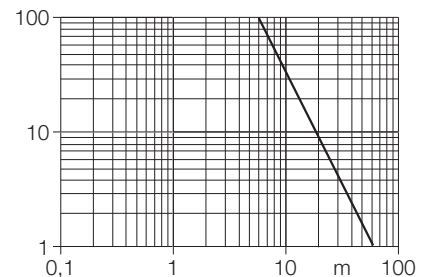

Type	T306E
Ident-No.	3032483
Operating mode	opposed mode sensor (emitter)
Light type	IR
Wavelength	950 nm
Range	0... 60000 mm
Ambient temperature	-40...+ 70°C
Operating voltage	10... 30 VDC
DC rated operational current	≤ 150 mA
No-load current I ₀	≤ 20 mA
Housing	cylindrical/threaded, T30
Dimensions	45x 40x 51.5mm
Housing material	Plastic, PBT
Lens	plastic, Lexan
Electrical connection	cables
Cable length	2 m
Cable cross section:	2 x 0.5mm ²
Protection class	IP68 / IP69K
Operating voltage	LED green