

MST Single phase control and isolation transformer P: 320VA IN: 230/400VAC OUT: 230VAC

Single-phase - Control and Isolation transformers
Power: 320 VA

Image

- (EN 61558)
- touch protected (EN 60529) IP20
- Isolation class T 40/B

Approvals**Technical Data**

Input voltage	230/400 V AC
Output voltage	230 V AC
Frequency	50/60 Hz
Standards	(EN 61558-2-4), (EN 62041) category 0
Test voltage	4 kV (prim./sec.)
Isolation class	T 40/B
Temperature range	-20...+40 °C, no condensation
Mounting method	Key-hole mounting
Short-circuit current	28 A (230 V AC); 16.1 A (400 V AC)
Inrush current	17.5 A (230 V AC); 10.1 A (400 V AC)
Input current	1.52 A (230 V AC); 0.88 A (400 V AC)

General data

Dimensions H x W x D	92.2 x 120 x 122.4 mm
Fixing centers a x b x c	74.4 x 90 x 5.8 mm
Drill hole Ø	5.8 x 10 mm


Commercial data

Gross weight	4150
Net weight	4150
Weight unit	gram
Basic unit	pc.
Customs tariff number	85043180
Unit (piece)	1
Limited value	1

Comments

Other voltages on request.

Circuit diagram

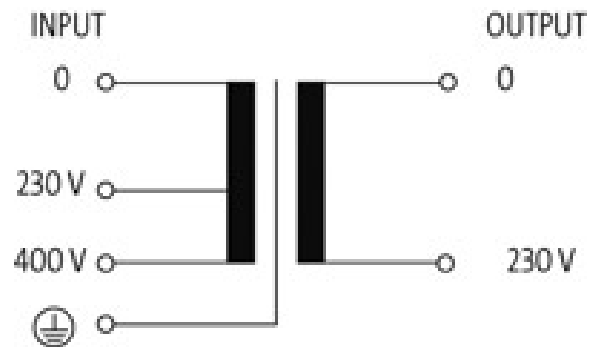

Dimension drawing

