


MTS Single phase safety transformer P: 100VA IN: 230/400VAC +/- 15VAC OUT: 24VAC

Single-phase safety transformer
Power: 100 VA

Image

- (EN 61558)
- touch protected (EN 60529) IP20

Approvals**Technical Data**

Input voltage	230/400 V AC ± 15 V AC
Output voltage	24 V AC (SELV)
Frequency	50/60 Hz
Standards	(EN 61558-2-6), (EN 62041) category 0
Test voltage	4 kV (prim./sec.)
Isolation class	T 40/B
Temperature range	-20...+40 °C, no condensation
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Short-circuit current	6.6 A (230 V AC); 3.8 A (400 V AC)
Inrush current	4.1 A (230 V AC); 2.3 A (400 V AC)
Input current	0.5 A (230 V AC); 0.3 A (400 V AC)

General data

Dimensions H x W x D	86 x 84 x 98 mm
Fixing centers a x b x c	64.5 x 64 x 4.8 mm
Drill hole Ø	4.8 x 8.4 mm


Commercial data

Gross weight	2110
Net weight	2000
Weight unit	gram
Basic unit	pc.
Customs tariff number	85043180
Unit (piece)	1
Limited value	1

Comments

Other voltages on request.

Circuit diagram

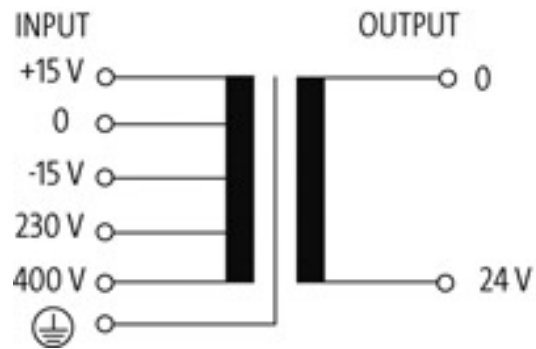

Dimension drawing

