



Fotoprzełączniki W4S-3 Inox Hygiene Glass, Fotoprzełącznik refleksyjny, autocollimation

WLG4S-3F3234H



Nazwa modelu > **WLG4S-3F3234H**

Numer części > **1048121**



Produkt może różnić się od ilustracji

At a glance

- Hygienic designed stainless steel housing and accessories (316L/1.4404)
- Hygienic mounting using M12-adapter thread or D12-adapter shaft
- IP 66, IP 67, IP 68 and IP 69K enclosure rating and Ecolab certified
- Resistant to a variety of common cleaning and disinfection agents
- PinPoint LED technology provides a highly visible laser-like light spot
- Teach-in stainless steel metal membrane or external teach-in

Your benefits

- Smooth hygienic housing and accessories with no grooves or crevices eliminates the potential for bacteria to grow, providing a more hygienic solution.
- Long service life in harsh conditions ensures less downtime and fewer replacement costs
- Reliable detection of all transparent objects in the pharmaceutical and food and beverage industries
- Quick and easy adjustment via a stainless steel metal membrane teach-in pushbutton
- Quick and easy alignment due to highly visible PinPoint emitter LED
- Remote monitoring and fast diagnostics via IO-Link (optional)



Cechy

Wymiary (Szer. x Wys. x Głęb.):	15,25 mm x 49,2 mm x 22,15 mm
Maks. strefa działania:	0 m ... 5 m ¹⁾
Sensing range:	0 m ... 3 m ²⁾
Housing desig (light emission):	Prostopadłościenna, Slim
Nadajnik światła:	Pin Point LED ³⁾
Rodzaj światła:	widzialne światło czerwone
Długość fali:	650 nm
Nastawienie czułości:	Teach ⁴⁾ Cable
Teach-in:	single teach-in button
Zasada działania czujnika/Sposób detekcji:	Fotoprzełącznik refleksyjny, autocollimation
Light spot (distance):	Ø 45 mm (1,5 m)

^{1) 2)} PL80A ³⁾ Average service life 100,000 h at Ta = +25 °C ⁴⁾ External teach-in: pulse > 2 s with voltage Uv with PNP and M with NPN

Mechanika/elektronika


Rodzaj zabezpieczenia:	IP 66 IP 67 IP 68 IP 69K
Napięcie zasilania:	10 V DC... 30 V DC ¹⁾
Tętnienia resztkowe:	< 5 Vss ²⁾
Pobór prądu:	≤ 30 mA ³⁾
Wyjście przełączające:	PNP, Dark-switching
Output current I _{max} :	≤ 100 mA
Czas reakcji:	< 0,5 ms ⁴⁾
Switching frequency:	1.000 Hz ⁵⁾
Sposób przyłączenia:	Cable with plug, M8, 4-pin, 150 mm ⁶⁾
Cable material:	PVC
Klasa ochronności:	III
Układ zabezpieczenia:::	A B 7) 8) 9) C
Ciężar:	50 g
Tworzywo, obudowa:	Edelstahl 316L
Ambient temperature, operation:	-35 °C ... 70 °C ¹⁰⁾ -35 °C ... 60 °C
Ambient temperature, storage:	-35 °C ... 75 °C
Filtr polaryzacyjny:	✓
Emitancja:	do obiektów transparentnych
IO-Link:	-
UL File-No.:	FDA, UL No. NRKH.E181493 & cUL No. NRKH7.E181493

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network, max. 8 A ²⁾ May not exceed or fall short of V_S ³⁾ Without load ⁴⁾ Signal transit time with resistive load ⁵⁾ With light/dark ratio 1:1 ⁶⁾ Do not bend below 0 °C ⁷⁾ A = V_S connections reverse-polarity protected ⁸⁾ B = inputs and output reverse-polarity protected ⁹⁾ C = interference suppression ¹⁰⁾ At UV ≤ 24 V and IA < 30 mA


Dimensional drawing

Image Unavailable
f:\Saqqara\im0042497.jpg


Connection diagram

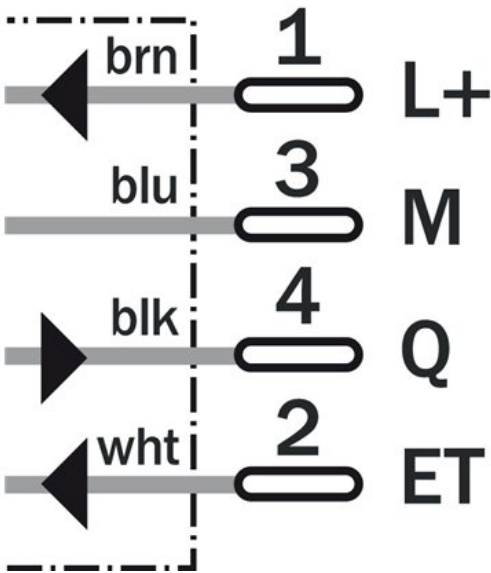


Connection type

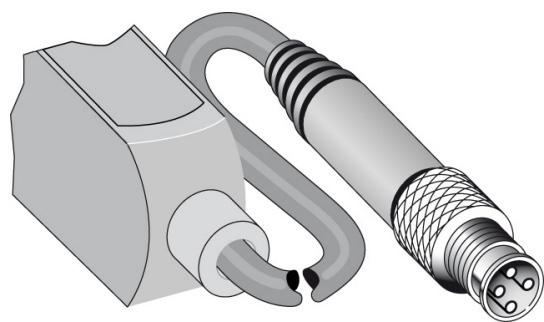

Characteristic curve

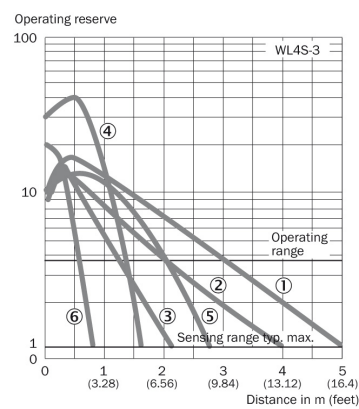

Sensing range diagram

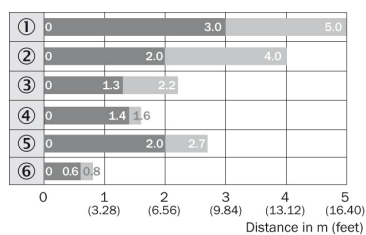

■ Operating range ■ Sensing range typ. max.

- ① Reflector type PL80A
- ② Reflector type PL40A
- ③ Reflector type PL20A
- ④ Reflector type PL10F
- ⑤ Reflector type P250 CHEM
- ⑥ Reflective tape REF-IRF-56

Australia

Phone +61 3 9497 4100
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Canada

Phone +1(952) 941-6780
1 800-325-7425 – tollfree
E-Mail info@sickusa.com

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +852-2763 6966
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail kundenservice@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-999-0590
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7 495 775 05 30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82-2 786 6321/4
E-Mail info@sickkorea.net

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 216 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 4 8865 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 800-325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com