


Actuator/sensor cable, PUR connection cable RKC4.4T-10/TXL

TURCK

Industrial
Automation

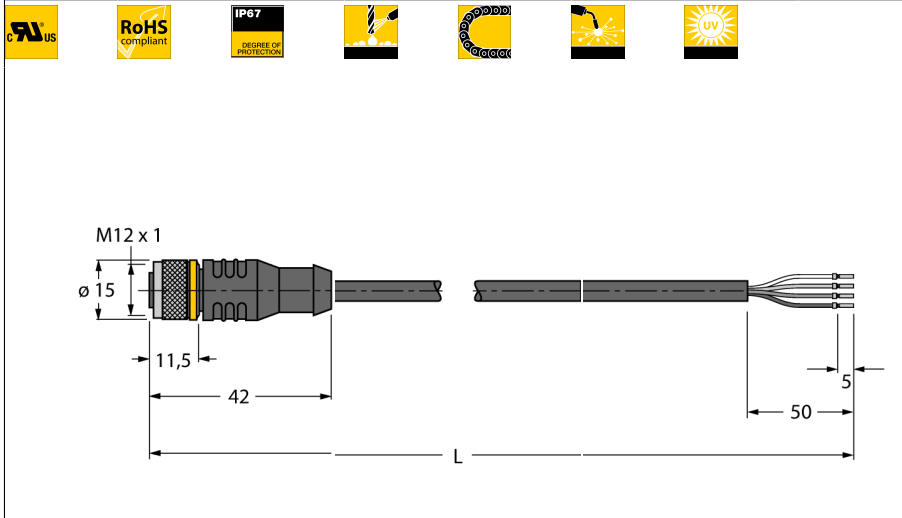

- Female M12, straight, 4-pin
- Sheath material: PUR
- Sheath color: black
- Qualified for drag chain use
- Resistant to weld splatter
- Resistant to chemicals, UV radiation and oils
- Flame retardant
- Free from halogen, silicone, PVC and LABS
- Particularly abrasion resistant
- Approval: cULus
- RoHS conform
- Protection class IP67
- Cable length: 10 m



Type code	RKC4.4T-10/TXL
Ident no.	6625505
Connector A side	female, M12 x 1, straight
Number of pins	4 pins
Contacts	metal, CuZn, gold-plated
Contact carriers	plastic, TPU, black
Grip	plastic, TPU, black
Coupling nut/screw	metal, CuZn, nickel-plated
Seal	plastic, FKM/FPM
Protection class	IP67, A + B side screwed together
Mechanical lifespan	> 100 mating cycles
Pollution degree	3
Tightening torque	0.8 ... 1 Nm (observe max. torque of counter piece!)

General data	
Cable diameter	Ø 4.7 Ø +/-0.20mm
Cable length	10 m
Cable material	PUR
Color cable	blue
Core insulation (colors)	PP (BN, WH, BU, BK)
Core cross-section	4x0.34mm ²
Litz wire arrangement	42x0.1 mm

Electrical features at +20 °C	
Rated current	4 A
Rated voltage [U _{max}]	250 V
Insulation resistance	> 30.5 MΩ/km
Test voltage	2000 V
Forward resistance	max. 57 Ω/km

Mechanical and chemical properties	
Max. tensile strength (static)	≤ 50 N/mm ²
Max. tensile strength (dynamic)	≤ 20 N/mm ²
Bending cycles	> 5 mil.
Bending radius (stationary laying)	> 5 x Ø
Bending radius (flexible use)	> 10 x Ø
Admissible acceleration	max. 5 m/s ²
Admissible travel path, horizontal	5 m (at 5 m/s ²)
Admissible travel path, vertical	2 m (at 5 m/s ²)
Admissible traversing speed	3.3 m/s
Torsional stress	± 180 °/m
Ambient temperature	
stationary	-50 ... 80°C
In motion	-25 ... 80°C
drag chain operation	-25 ... 60°C

Conductor cross-section

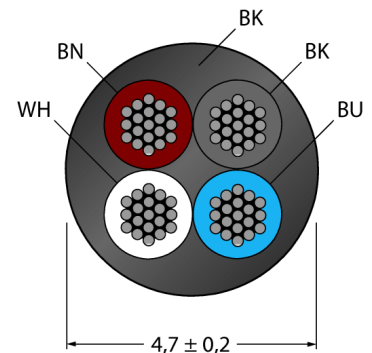

circuit diagram

