Product data sheet
Characteristics

XE2NP3141
limit switch contact block - 2NC - slow-break, simultaneous

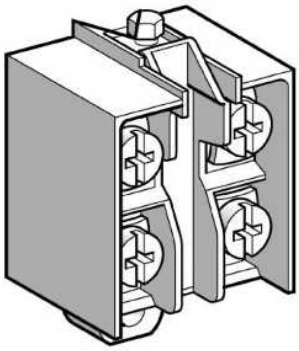

Main

Range of product	OsiSense XC
Series name	Standard format
Product or component type	Limit switch contact block
Device short name	XE2N
Associated body	ZCT27
Number of poles	2
Contacts type and composition	2 NC
Contacts operation	Slow-break, simultaneous

Complementary

Product compatibility	XCKT
Electrical connection	Screw-clamp terminals, clamping capacity: 1 x 0.5...2 x 2.5 mm²
Contacts insulation form	Zb
Contacts material	Silver plated contacts
Positive opening	With
Minimum actuation speed	6 m/min
Contact code designation	A300, AC-15 (Ue = 240 V, Ie = 3 A), Ithe = 10 A) conforming to EN/IEC 60947-5-1 appendix A Q300, DC-13 250 V, Ie = 0.27 A) conforming to EN/IEC 60947-5-1 appendix A
Resistance across terminals	< 25 mOhm conforming to IEC 60255-7 category 3
[Ui] rated insulation voltage	300 V conforming to CSA C22-2 No 14 300 V conforming to UL 508 500 V degree of pollution 3 conforming to IEC 60947-1
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60664 6 kV conforming to IEC 60947-1
Short circuit protection	10 A by gG cartridge fuse
Electrical durability	5000000 cycles, DC-13 120 V, 7 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 24 V, 13 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 48 V, 9 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C

Environment

RoHS EUR status	Compliant
RoHS EUR conformity date	0851

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.