


XCSPL793

plastic guard switch XCSPL - 2 NC - rotary
lever - 1 entry tapped 1/2" NPT

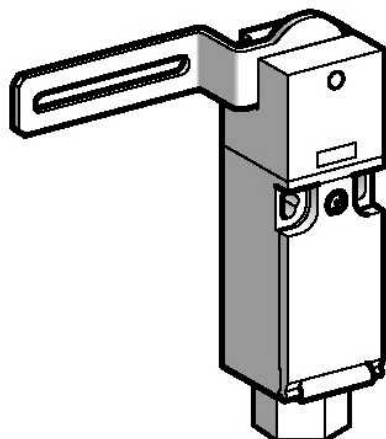

Main

Range of product	Preventa Safety detection
Product or component type	Guard switch
Component name	XCSPL
Material	Plastic
Head type	Turret head rotary lever
Insulation	Double insulated
Type of operator	Elbowed flush lever
Operator direction information	To left
Electrical connection	Terminal
Contacts type and composition	1 NC + 1 NC
Contacts operation	Slow-break
Clamping connection capacity	1 x 0.5...2 x 1.5 mm ² with or without cable end
Cable entry	1 entry tapped 1/2" NPT
Number of poles	2

Complementary

Cable outer diameter	7...10 mm
Positive opening	With NC contact
Tripping angle	5 °
Mechanical durability	1000000 cycles
Minimum torque for tripping	0.1 N.m
Positive opening minimum torque	0.25 N.m
Contact code designation	Q300, DC-13 (Ue = 250 V, Ie = 0.27 A) conforming to EN/IEC 60947-5-1 Q300, DC-13 (Ue = 125 V, Ie = 0.55 A) conforming to EN/IEC 60947-5-1 A300, AC-15 (Ue = 240 V, Ie = 3 A) conforming to EN/IEC 60947-5-1 A300, AC-15 (Ue = 120 V, Ie = 6 A) conforming to EN/IEC 60947-5-1
[Ui] rated insulation voltage	500 V conforming to EN/IEC 60947-1 300 V conforming to UL 508 300 V conforming to CSA C22-2 No 14
[Uimp] rated impulse withstand voltage	6 kV conforming to EN/IEC 60947-5-1
Resistance across terminals	<= 30 mOhm conforming to EN/IEC 60947-5-4
Short circuit protection	10 A cartridge fuse type gG (gl)
Safety level	Can reach SIL 3 with the appropriate monitoring system and correctly wired conforming to IEC 61508 Can reach PL = e with the appropriate monitoring system and correctly wired conforming to EN/ISO 13849-1 Can reach category 4 with the appropriate monitoring system and correctly wired conforming to EN/ISO 13849-1
Safety reliability data	B10d = 5000000 (value given for a life time of 20 years limited by mechanical or contact wear)
Enclosure material	Polyamide PA66 fibre glass impregnated
Lever material	Stainless steel
CAD overall width	103 mm
CAD overall height	102 mm
CAD overall depth	30 mm
Product weight	0.11 kg

Environment

Standards	CSA C22-2 No 14 EN 1088/ISO 14119 EN/IEC 60204-1 EN/IEC 60947-5-1 EN/IEC 60947-5-4 EN/ISO 12100 UL 508
Product certifications	BG CSA UL
Protective treatment	TC TH
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...70 °C
Vibration resistance	50 gn (f = 10...500 Hz) conforming to IEC 60068-2-6
Shock resistance	50 gn for 11 ms conforming to IEC 60068-2-27
Class of protection against electric shock	Class II conforming to IEC 60536
IP degree of protection	IP67 conforming to IEC 60529

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS	Compliant - since 1136 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental
Product end of life instructions	Available Download End Of Life Manual

Contractual warranty

Period	18 months
--------	-----------